

### Features


- N.I.S.T. traceable
- Real-time operation
- Low cost
- Programmable start time
- Reusable
- Miniature size
- User-friendly
- CE compliant

### Applications

- Altitude validation
- Warehouse monitoring
- HVAC
- Medical and Pharmaceutical
- Museum monitoring
- Environmental studies
- Implement HACCP programs
- Research and Development
- Food and storage
- Shipping live cargo

The PRHTemp101 is a miniature, battery powered, stand alone pressure, humidity and temperature recorder. This is an all-in-one compact,

portable, easy to use device that will measure and record up to 13,107 measurements. The storage medium is non-volatile solid state memory, providing maximum data security even if the battery becomes discharged. The device can be started and stopped directly from your computer and it's small size allows it to fit almost anywhere. The PRHTemp101 makes data retrieval quick and easy. Simply plug it into an empty COM or USB port and our user-friendly software does the rest.

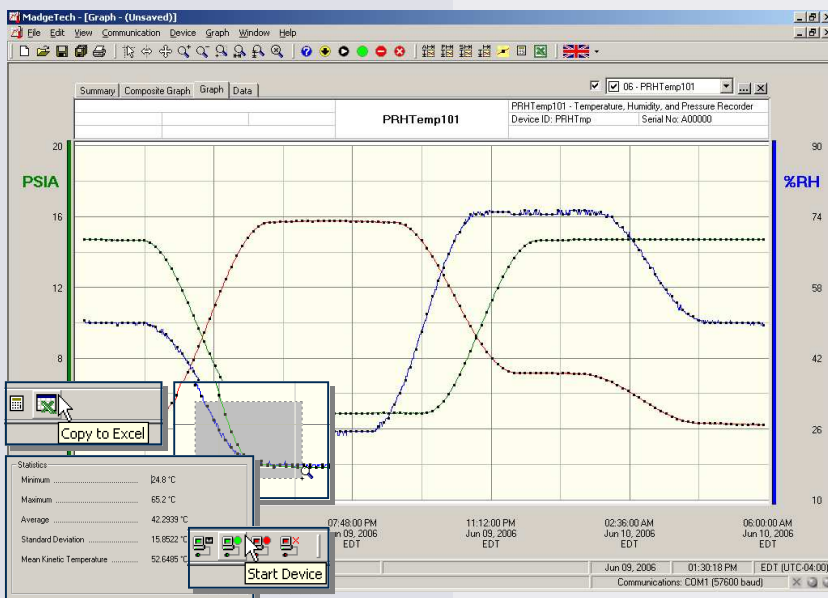

### MadgeTech Data Recorder Software

displays pressure, humidity and temperature data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

Click [MadgeTech Software](#) for more information or to download the software.

## PRHTEMP101 SPECIFICATIONS\*

<b>Temperature Range:</b> -40 to +80°C	<b>Memory:</b> 13,107 readings per channel; 39,321 total readings
<b>Temperature Resolution:</b> 0.1°C	<b>Reading Rate:</b> 1 reading every 2 seconds to 1 every 12 hours
<b>Calibrated Accuracy:</b> ±0.5°C(0 to +50°C)	<b>Calibration:</b> Digital calibration through software
<b>Humidity Range:</b> 0 to 95%RH	<b>Calibration Date:</b> Automatically recorded within device
<b>Humidity Resolution:</b> 0.5%RH	<b>Battery Type:</b> 3.6V lithium battery included; <b>user replaceable</b>
<b>Calibrated Accuracy:</b> ±3%RH (±2%RH typical at 25°C)	<b>Battery Life:</b> 1 year typical
<b>Specified Accuracy Range:</b> +10 to +40°C, 10 to 80%RH	<b>Data Format:</b> Date and time stamped °C, °F, K, °R ; %RH, mg/ml water vapor concentration; PSIA, inHg, mmHg, bar, atm, Torr, Pa, kPa, MPa, altitude
<b>Pressure Range:</b> 0 to 30PSIA	<b>Time Accuracy:</b> ±1 minute/month (at 20°C, RS232 cable not in use)
<b>Pressure Resolution:</b> 0.002PSIA	<b>Computer Interface:</b> PC serial or USB (interface cable required); 2,400 baud
<b>Calibrated Accuracy:</b> ±1.0%FSR at 25°C; ±0.2% typical	<b>Software:</b> Windows 95/98/ME/NT/2000/XP/Vista based software
<b>Start Modes:</b> Software programmable immediate start or delay start up to six months in advance	<b>Operating Environment:</b> -40 to +80°C, 0 to 95%RH non-condensing
<b>Real Time Recording:</b> May be used with PC to monitor and record data in real time	<b>Dimensions:</b> 1.7" x 2.3" x 0.9" (44mm x 59mm x 23mm)
	<b>Weight:</b> 1.1 oz (31 g)
	<b>Approvals:</b> CE

**BATTERY WARNING:** FIRE, EXPLOSION, AND SEVERE BURN HAZARD. DO NOT RECHARGE, DISASSEMBLE, HEAT ABOVE 212°F, INCINERATE OR EXPOSE CONTENTS TO WATER.

## SOFTWARE FEATURES

<b>Multiple Graphs:</b> Simultaneously analyze data from several units or deployments; easily switch to a single data series	<b>Statistics:</b> Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
<b>Real-Time Recording:</b> Collect and display data in real-time while continuing to log	<b>Export Data:</b> Export data in a variety of common formats, or switch to Excel® with a single click
<b>Graphical Cursor:</b> One click displays readings by time, value, parameter or sample number	<b>Calibration:</b> Automatically calculate and store calibration parameters
<b>Data Table:</b> Instantly access tabular view for detailed dates, times, values, and annotations	<b>Logger Configuration:</b> Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
<b>Scaling Options:</b> Autoscale function fits data to the screen, or allows user to manually enter their own values	<b>Communications:</b> Automatically sets up communications port, or lets user select configuration
<b>Formatting Options:</b> Change colors, line styles, plotting options, show or hide channels quickly	<b>Printing:</b> Automatically print graphical or tabular data

\*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

## ORDERING INFORMATION

Model	Description	Price (U.S.)
PRHTEMP101	Pressure, Humidity and Temperature Recorder	\$299.00
IFC110	Software, manual and RS232 interface cable	\$99.00
IFC200	Software, manual and USB interface cable	\$119.00
NIST	N.I.S.T. Calibration Certificate	Call for Pricing
LTC-7PN	Replacement battery for PRHTemp101	\$10.00

### ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration
LCD Display	

For Quantity Discounts call 603-456-2011 or email [sales@madgetech.com](mailto:sales@madgetech.com)



DOC-1027000-00 REV C 2009.07.01