

Features


- Intrinsically safe
- Rugged
- Programmable start time
- Real-time operation
- User-friendly
- Low cost
- 1/4" NPT pressure port



Applications

- Oil & gas industries
- Pneumatics
- Process control systems
- Gas compressors
- Natural gas production
- Lubrication systems
- Chemical processing
- Pulp and paper processing
- Medical instrumentation
- Environmental studies
- Waste water treatment
- HVAC
- Refrigeration

The PRTemp1000IS is a rugged pressure recorder that accurately monitors and records pressure and temperature at user programmable reading intervals. The PRTemp1000IS has been Factory Mutual certified as intrinsically safe for Class I, Division 1, groups A, B, C and D and non-incendive for Class I, Division 2, groups A, B, C and D. This certification makes the device ideal for uses in hostile environment applications such as air conditioning systems, chilled water, hot water, air, gas, oil and steam pressure systems. The internal temperature sensor provides accurate temperature measurements without the need of a separate temperature recorder. The logger can be started to take measurements as often as every two seconds, up to one reading every twelve hours. It will store up to 16,383 readings in its non-volatile memory. The PRTemp1000IS uses a rugged stainless steel pressure strain gauge to accurately measure the pressure. The device comes standard with a common 1/4" NPT fitting, which allows the logger to be adapted to almost any pressure fitting. There are many different pressure ranges available to suit most any application. The standard pressure ranges are 30 PSIA(G), 100 PSIA(G), 300 PSIA(G), 500 PSIA(G), 1000 PSIA and 5000 PSIA.

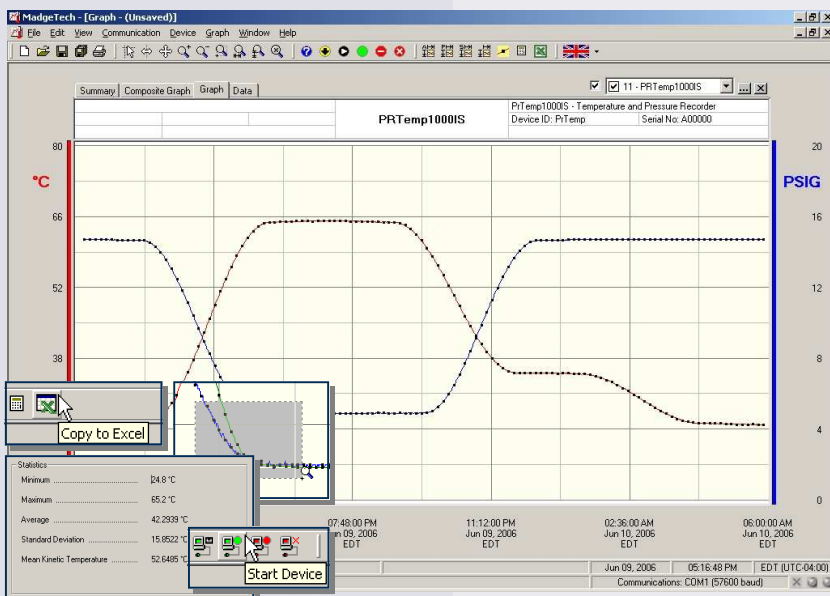

MadgeTech Data Recorder Software

displays pressure and temperature data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

Click [MadgeTech Software](#) for more information or to download the software.

PRTEMP1000IS SPECIFICATIONS*

Temperature Sensor: Semiconductor	Memory: 16,383 readings per channel; 32,766 total readings
Temperature Range: -40 to +80°C	Reading Rate: 1 reading every 2 seconds to 1 every 12 hours
Temperature Resolution: 0.1°C	Calibration: Digital calibration through software
Calibrated Accuracy: ±0.5°C	Calibration Date: Automatically recorded within device
Pressure Sensor: Semiconductor strain gauge	Battery Type: 3.6V lithium battery included; user replaceable
Pressure Range: 0 to 30, 100, 300 and 500 PSIA/G; 0 to 1000 and 5000 PSIA	Battery Life: 1 year typical (1 minute reading rate @ 25°C)
Pressure Resolution: 0.002, 0.005, 0.02, 0.05 PSIA/G; 0.05, 0.2 PSIA	Data Format: Date and time stamped °C, °F, K, °R ; PSIA(g), inches, feet, mmHg, bar, Torr, kPa,
Calibrated Accuracy: 2%FSR, 0.25% @ 25°C typical	Time Accuracy: ±1 minute/month (at 20°C, RS232 port not in use)
Pressure Response Time: 0.1ms (10 to 90%FSR)	Computer Interface: PC serial or USB (interface cable required); 2,400 baud
Repeatability: ±0.5%FSR; ±0.2% typical	Software: Windows 95/98/ME/NT/2000/XP/Vista based software
Adaptor: 1/4" male NPT	Operating Environment: -40 to +80°C, 0 to 100%RH
Start Modes: Software programmable immediate start or delay start up to six months in advance	Dimensions: 6.4" x 1.25" dia. (163mm x 32mm dia.)
Real Time Recording: May be used with PC to monitor and record data in real time	Weight: 12 oz (340g)
	Material: Stainless Steel
	Approvals: CE FM Certified Intrinsically Safe for Class I, Division 1 groups A, B, C and D

BATTERY WARNING: RISK OF FIRE OR EXPLOSION. DO NOT RECHARGE, FORCE OPEN, HEAT OR DISPOSE OF IN FIRE.

SOFTWARE FEATURES

Multiple Graphs: Simultaneously analyze data from several units or deployments; easily switch to a single data series	Statistics: Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
Graphical Cursor: One click displays readings by time, value, parameter or sample number	Export Data: Export data in a variety of common formats, or switch to Excel® with a single click
Data Table: Instantly access tabular view for detailed dates, times, values, and annotations	Calibration: Automatically calculate and store calibration parameters
Scaling Options: Autoscale function fits data to the screen, or allows user to manually enter their own values	Logger Configuration: Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
Formatting Options: Change colors, line styles, plotting options, show or hide channels quickly	Communications: Automatically sets up communications port, or lets user select configuration

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY. CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

ORDERING INFORMATION

Model	Description	Price (U.S.)
PRTEMP1000IS-30	0-30PSIA(G) Intrinsically Safe Pressure and Temperature Recorder	\$649.00
PRTEMP1000IS-100	0-100PSIA(G) Intrinsically Safe Pressure and Temperature Recorder	\$649.00
PRTEMP1000IS-300	0-300PSIA(G) Intrinsically Safe Pressure and Temperature Recorder	\$649.00
PRTEMP1000IS-500	0-500PSIA(G) Intrinsically Safe Pressure and Temperature Recorder	\$649.00
PRTEMP1000IS-1000	0-1000PSIA Intrinsically Safe Pressure and Temperature Recorder	\$649.00
PRTEMP1000IS-5000	0-5000PSIA Intrinsically Safe Pressure and Temperature Recorder	\$649.00
IFC110	Software, manual and RS232 interface cable	\$ 99.00
IFC200	Software, manual and USB interface cable	\$119.00
NIST	N.I.S.T. Calibration Certificate	Call for Pricing
TL-2150	Replacement battery for PRTemp1000IS	\$ 10.00
SVP-Secure	Protocols for validating the 21 CFR Part 11 ready, secure data logging system	\$600.00
SVP-Secure License	License for MadgeTech SVP-Secure Software (unlimited users, license per computer)	\$1000.00

ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration
LCD Display	

For Quantity Discounts call 603-456-2011 or email sales@madgetech.com

