

OCTTHERMOVAULT

8 CHANNEL OVEN TEMPERATURE DATA LOGGER



Features

- NIST traceable
- Programmable start time
- Reusable
- Convenient size
- User-friendly
- Automatic cold junction compensation
- Automatic thermocouple linearization
- Type K thermocouples and power supply included

Applications

- Extreme temperature monitoring
- Oven profiling
- Powder coating cure ovens
- Wet coating cure ovens
- Batch ovens
- Conveyor ovens
- Implement HACCP programs


Oven temperature profiling can help ensure that a quality product is consistently produced. Profiling enables users to optimize their process, prove process control and make corrections to a process when required. The OctThermoVault is an eight channel thermally insulated, battery powered, oven temperature recorder able to withstand extreme temperatures. It can withstand oven temperatures of up to 662 °F for up to 25 minutes when properly sealed. Its stainless steel enclosure and thermal properties lend itself to be the ideal temperature recording device for applications such as powder coating cure ovens, wet coating cure ovens, batch ovens and conveyor ovens. The external thermocouple probes provide accurate temperature measurements, with fast response times. Our user-friendly software easily downloads the data to a computer, where the readings may be displayed in degrees Celsius, degrees Fahrenheit, Kelvin or Rankine. The software allows the user to view all data points or a range of data points and a summary of the data being viewed for calculations such as Mean Kinetic Temperature (MKT). If additional analysis of the data needs to be performed, the data can be easily exported to Excel® by simply clicking a button.



MADGETECH DATA LOGGER SOFTWARE

Key

- A** Graph View
- B** Tabular Data View
- C** Statistics
- D** Digital Calibration
- E** Copy to Excel®

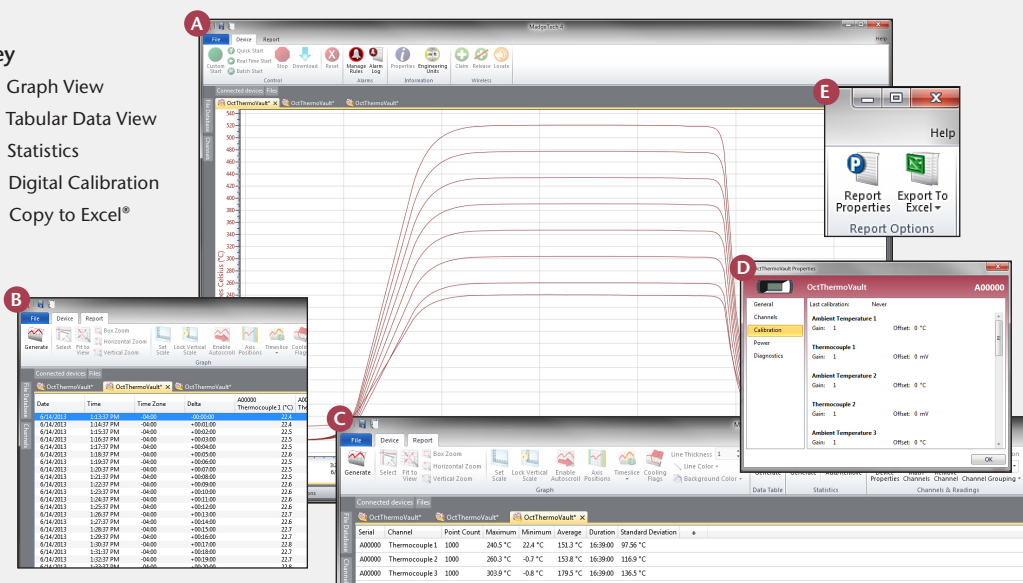

Software Features:

- Multiple graph overlay
- Statistics
- Digital calibration
- Zoom in/ zoom out
- Lethality equations (F0, PU)
- Mean Kinetic Temperature
- Full time zone support
- Data annotation
- Min./Max./Average lines
- Data table view
- Automatic report generation
- Summary view
- Multilingual

OCTTHERMOVAULT SPECIFICATIONS*

*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. SPECIFIC WARRANTY REMEDY LIMITATIONS APPLY. CALL (603) 456-2011 OR GO TO MADGETECH.COM FOR DETAILS.

8 Internal Channels	
Temperature Range:	-20 °C to +60 °C
Temperature Resolution:	0.01 °C
Calibrated Accuracy:	±0.5 °C (0 °C to +50 °C)
8 Remote Channels	
Thermocouple Types:	J, K, T, E, R, S, B, N
Thermocouple Connection:	Female subminiature (SMP)
Cold Junction Compensation:	Automatic, based on internal channel
Maximum Exposure Time	
Ambient Temperature	Maximum Duration in Minutes
100 °C (212 °F)	110
150 °C (302 °F)	62
200 °C (392 °F)	45
250 °C (482 °F)	35
260 °C (500 °F)	33
300 °C (572 °F)	30
350 °C (662 °F)	25

BATTERY WARNING: BATTERY MAY LEAK, FLAME OR EXPLODE IF DISASSEMBLED, SHORTED, CHARGED, CONNECTED TOGETHER, MIXED WITH USED OR OTHER BATTERIES, EXPOSED TO FIRE OR HIGH TEMPERATURE. DISCARD USED BATTERY PROMPTLY. KEEP OUT OF REACH OF CHILDREN.

Start Modes:	Software programmable immediate start or delay start up to six months in advance
Real Time Recording:	May be used with PC to monitor and record data in real time
Memory: (all 8 channels enabled)	16,368 readings per channel; 130,944 total readings
Reading Rate:	4 readings every second up to 1 reading every 24 hours
Calibration:	Digital calibration through software
Calibration Date:	Automatically recorded within device
Battery Type:	9V lithium or alkaline battery included, user replaceable
Battery Life:	18 months typical
Data Format:	Date and time stamped °C, °F, °K, °R; µV, mV, V
Time Accuracy:	±1 minute/month
Computer Interface:	USB (cable required); 115,200 baud
Software:	Windows XP SP3 or later
Operating Environment:	See table for temperature, 0 %RH to 95 %RH non-condensing
Internal OctTemp:	-20 °C to +55 °C, 0 %RH to 95 %RH non-condensing
OctThermoVault System:	-20 °C to +350 °C, 0 %RH to 95 %RH non-condensing
Weight:	8.98 lb (4.07 kg)
Dimensions:	12.3 in x 6.65 in x 2.45 in (723 mm x 168 mm x 62 mm) [Includes handles, brackets and front enclosure latches] 9.1 in x 5.9 in x 2.45 in (231 mm x 149 mm x 62 mm) [Enclosure case only. Excludes handles, brackets and latches]

ORDERING INFORMATION

MODEL	PART NUMBER	DESCRIPTION
OCTTHERMOVAULT	900437-00	8-Channel Oven Temperature Recorder (72" type K thermocouples and AC power supply included)
IFC200	900298-00	Software, manual and USB interface cable
U9VL-J	901804-00	Replacement battery for OctThermoVault

**ASK ABOUT
OUR OTHER
DATA
LOGGERS**

Temperature
Humidity
Pressure
pH
Level
Shock
LCD Display
Pulse/Event/State
Current
Voltage
Wireless
Intrinsically Safe
Spectral Vibration
Motion

For Quantity Discounts call (603) 456-2011 or email sales@madgetech.com