

### Features

- Rugged
- Reusable
- Submersible
- Programmable start time
- Real-time operation
- User-friendly
- Low cost
- CE compliant

### Applications

- Pneumatics
- Process control systems
- Gas compressors
- Natural gas production
- Lubrication systems
- Chemical processing
- Pulp and paper processing
- Medical instrumentation
- Environmental studies
- Waste water treatment
- HVAC
- Oil & gas industries


The PRTemp1000 is a rugged pressure recorder to accurately monitor and record pressure and temperature at user programmable reading intervals. The rugged stainless steel design allows for the device to be placed in harsh environments, which makes it well suited for use with air conditioning systems, chilled water, hot water, air, gas, oil and steam pressure systems.



The internal temperature sensor provides accurate temperature measurements without the need for a separate temperature recorder. The logger can be started to take measurements as often as every two seconds, up to one reading every twelve hours. It will store up to 16,383 readings in its non-volatile memory.

The PRTemp1000 uses a rugged stainless steel pressure strain gauge to accurately measure the pressure. The device comes standard with a 1/4" NPT fitting, which allows the logger to be connected to almost any pressure adapter. The PRTemp1000 is also available in a fully submersible version upon request.

There are many different pressure ranges available to fit most any application. The standard pressure ranges are 30 PSIA(G), 100 PSIA(G), 300 PSIA(G), 500 PSIA(G), 1000 PSIA and 5000 PSIA. Other ranges may also be available upon request.

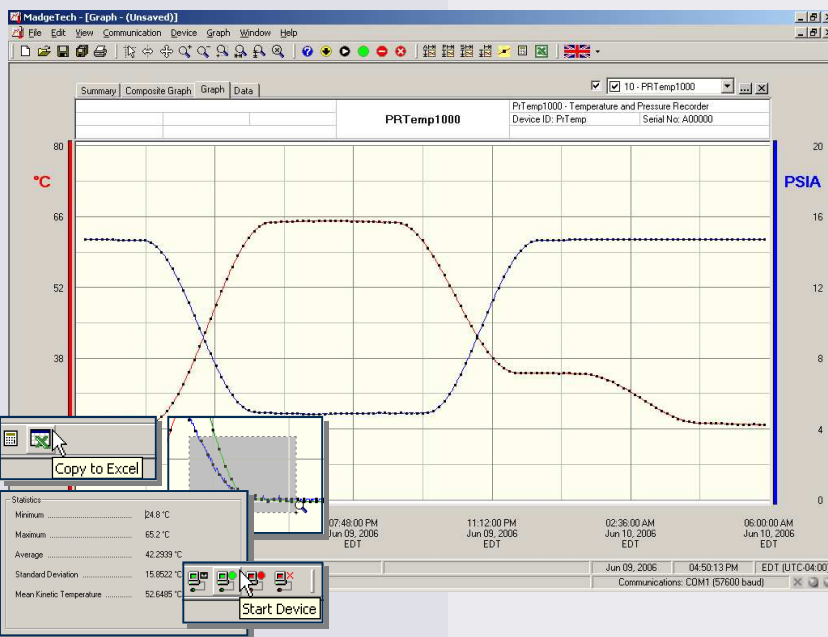

### MadgeTech Data Recorder Software

displays pressure and temperature data in an easy to use graph.

The Windows®-based software package allows the user to effortlessly collect, display and analyze data. A variety of powerful tools allow you to examine, export, and print professional looking data with just a click of the mouse.

Click [MadgeTech Software](#) for more information or to download the software.

## PRTEMP1000 SPECIFICATIONS\*

<b>Temperature Sensor:</b> Semiconductor	<b>Memory:</b> 16,383 readings per channel, 32,766 total readings
<b>Temperature Range:</b> -40 to +80°C	<b>Reading Rate:</b> 1 reading every 2 seconds to 1 every 12 hours
<b>Temperature Resolution:</b> 0.1°C	<b>Calibration:</b> Digital calibration through software
<b>Calibrated Accuracy:</b> ±0.5°C	<b>Calibration Date:</b> Automatically recorded within device
<b>Pressure Sensor:</b> Semiconductor strain gauge	<b>Battery Type:</b> 3.6V lithium battery included; <b>user replaceable</b>
<b>Pressure Range:</b> 0 to 30, 100, 300 and 500PSIA/G; 0 to 1000 and 5000PSIA	<b>Battery Life:</b> 1 year typical
<b>Pressure Resolution:</b> 0.002, 0.005, 0.02, 0.05PSIA/G; 0.05, 0.2PSIA	<b>Data Format:</b> Date and time stamped °C, °F, K, °R ; PSIA(g), inches, feet, mmHg, bar, Torr, kPa,
<b>Calibrated Accuracy:</b> 2% FSR, 0.25% @ 25°C typical	<b>Time Accuracy:</b> ±1 minute/month (at 20°C, RS232 port not in use)
<b>Pressure Response Time:</b> 0.1 ms (10 to 90% FSR)	<b>Computer Interface:</b> PC serial or USB (interface cable required); 2,400 baud
<b>Repeatability:</b> ±0.5% FSR; ±0.2% typical	<b>Software:</b> Windows 95/98/ME/NT/2000/XP/Vista based software
<b>Adaptor:</b> 1/4" male NPT or submersible up to 60 PSI	<b>Operating Environment:</b> -40 to +80°C, 0 to 100%RH
<b>Start Modes:</b> Software programmable immediate start or delay start up to six months in advance	<b>Dimensions:</b> 6.4" x 1.25" (163mm x 32mm)
<b>Real Time Recording:</b> May be used with PC to monitor and record data in real time	<b>Weight:</b> 12 oz (340 g)
	<b>Material:</b> Stainless Steel
	<b>Approvals:</b> CE

**BATTERY WARNING:** RISK OF FIRE OR EXPLOSION. DO NOT RECHARGE, FORCE OPEN, HEAT OR DISPOSE OF IN FIRE.

## SOFTWARE FEATURES

<b>Multiple Graphs:</b> Simultaneously analyze data from several units or deployments; easily switch to a single data series	<b>Statistics:</b> Calculate averages, min, max, standard deviation, and mean kinetic temperature with the touch of a button
<b>Graphical Cursor:</b> One click displays readings by time, value, parameter or sample number	<b>Export Data:</b> Export data in a variety of common formats, or switch to Excel® with a single click
<b>Data Table:</b> Instantly access tabular view for detailed dates, times, values, and annotations	<b>Calibration:</b> Automatically calculate and store calibration parameters
<b>Scaling Options:</b> Autoscale function fits data to the screen, or allows user to manually enter their own values	<b>Logger Configuration:</b> Easy set up and launch of data loggers with immediate or delayed start, preferred sample rate, and device ID
<b>Formatting Options:</b> Change colors, line styles, plotting options, show or hide channels quickly	<b>Communications:</b> Automatically sets up communications port, or lets user select configuration

\*SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.  
SPECIFIC WARRANTY AND REMEDY LIMITATIONS APPLY.  
CALL 1-603-456-2011 OR GO TO WWW.MADGETECH.COM FOR DETAILS.

## ORDERING INFORMATION

Model	Description	Price (U.S.)
PRTEMP1000-30	0-30PSIA(G) Pressure and Temperature Recorder	\$649.00
PRTEMP1000-100	0-100PSIA(G) Pressure and Temperature Recorder	\$649.00
PRTEMP1000-300	0-300PSIA(G) Pressure and Temperature Recorder	\$649.00
PRTEMP1000-500	0-500PSIA(G) Pressure and Temperature Recorder	\$649.00
PRTEMP1000-1000	0-1000PSIA Pressure and Temperature Recorder	\$649.00
PRTEMP1000-5000	0-5000PSIA Pressure and Temperature Recorder	\$649.00
IFC110	Software, manual and RS232 interface cable	\$ 99.00
IFC200	Software, manual and USB interface cable	\$119.00
NIST	N.I.S.T. Calibration Certificate	Call for Pricing
TLH-5902	Replacement battery for PRTemp1000	\$ 15.00

### ASK ABOUT OUR OTHER DATA RECORDERS

Temperature	Pulse/Event/State
Humidity	Low Level Current
Pressure	Low Level Voltage
pH	RF Transmitters
Level	Intrinsically Safe
Shock	Spectral Vibration
LCD Display	

For Quantity Discounts call 603-456-2011 or email [sales@madgetech.com](mailto:sales@madgetech.com)



DOC-1029009-00 REV D 2009.07.01